





F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
80	81-1WS-3	ROCK ISLAND	16	13
STA. _____		TO STA. _____		
FED. ROAD DIST. NO. _____		ILLINOIS	FED. AID PROJECT _____	
CONTRACT 64600				

WEIGH-IN-MOTION SCALE DETAIL

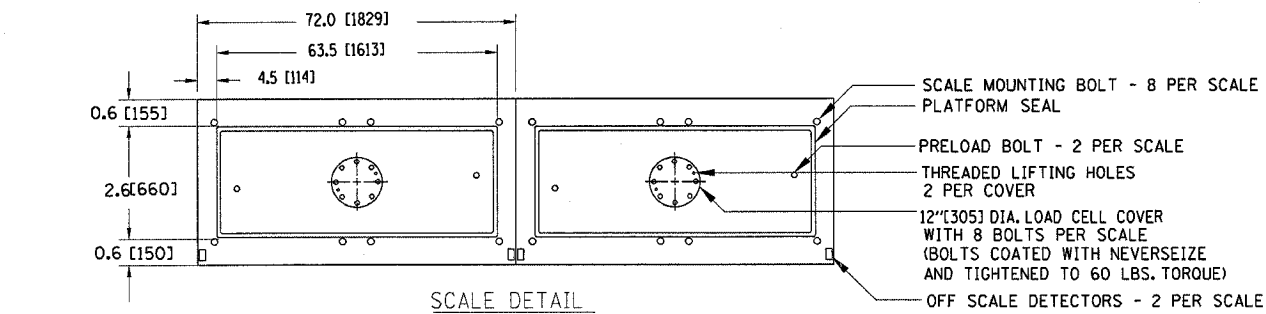

- NOTES:
1. REINFORCEMENTS AND DOWELS AS SHOWN ARE MINIMUM REQUIREMENTS AND MAY BE SUPERCEDED BY STATE CONSTRUCTION CODES.
  2. FOR PCC PAVEMENTS INSTALL 5/8" [161] x 16" [406] EPOXY COATED DOWELS IN 3/4" [191] x 8" [203] DEEP HOLE @ 16" [406] O.C. SECURE DOWEL INTO HOLE WITH EPOXY. ENSURE DOWELS ARE EXACTLY 90% TO LONGITUDINAL PAVEMENT DIRECTION BOTH VERTICALLY AND HORIZONTALLY.

CONTINUOUS CONCRETE SUPPORT ALONG UNDERSIDE OF FRAME  
SLOPE CONCRETE TO DRAIN MIN. SLOPE 3%

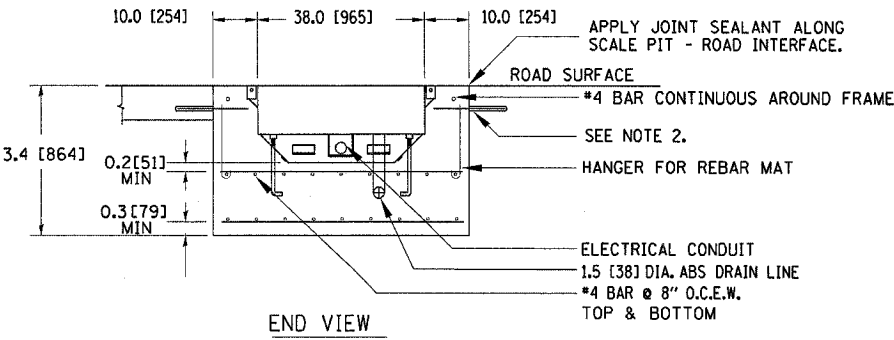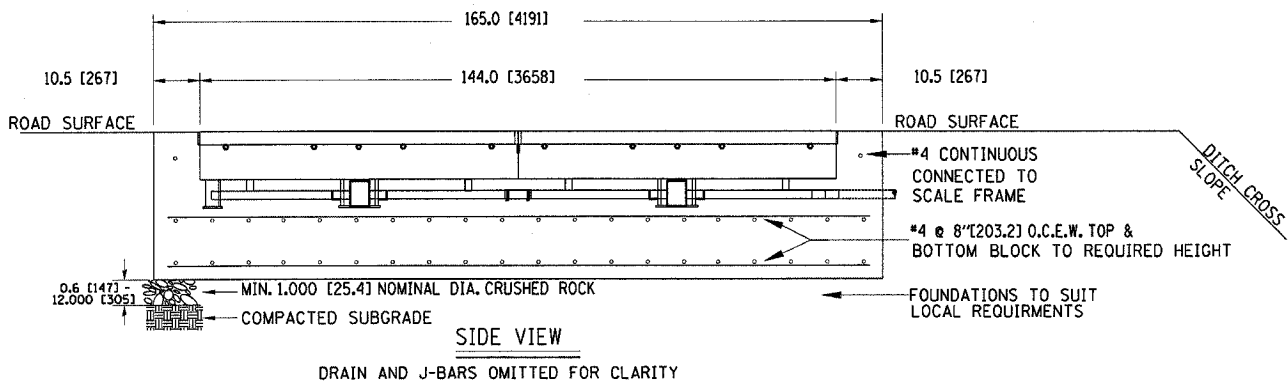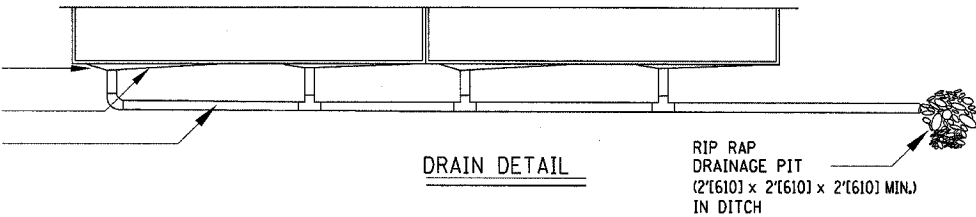

REVISIONS		ILLINOIS DEPARTMENT OF TRANSPORTATION
NAME	DATE	
SCALE: VERT.		DRAWN BY
DATE		
		CHECKED BY